


Type 10



Imperial

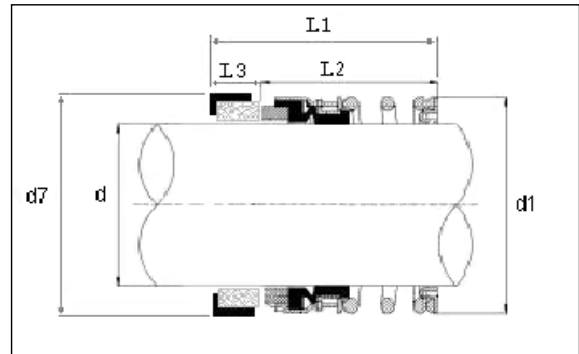

INCHES	d	d1	d7	L1	L2	L3
5/8"	15.8	27.8	30.95	43.62	33.3	10.32
3/4"	19	30.9	34.15	43.62	33.3	10.32
7/8"	22.2	34.1	37.3	43.62	33.3	10.32
1"	25.4	38.1	40.5	50.02	39.7	10.32
1 1/8"	28.5	41.3	47.63	53.29	41.3	11.99
1 1/4"	31.7	46	50.8	53.29	41.3	11.99
1 3/8"	34.9	47.6	53.98	54.89	42.9	11.99
1 1/2"	38.1	50.8	57.15	54.89	42.9	11.99
1 5/8"	41.2	57.2	60.35	62.79	50.8	11.99
1 3/4"	44.4	60.4	63.5	62.79	50.8	11.99
1 7/8"	47.6	63.5	66.7	65.99	54	11.99
2"	50.8	66.7	69.85	65.99	54	11.99
2 1/8"	53.9	71.4	73.15	73.8	60.3	13.5
2 1/4"	57.1	74.6	79.4	73.8	60.3	13.5
2 3/8"	60.3	78.3	79.4	77	63.5	13.5
2 1/2"	63.5	81	82.5	77	63.5	13.5
2 5/8"	66.6	85.7	92.1	85.8	69.9	15.9
2 3/4"	69.8	88.9	85.52	85.8	69.9	15.9
2 7/8"	73	92.1	98.45	88.9	73	15.9
3"	76.2	95.3	101.65	88.9	73	15.9

Operating limits :

Pressure : 28 bar
 Temperature : -30 °C - 204 °C (Viton)
 Speed : 15 m/s

Faces :

Carbon vs Ceramic
 Silicon vs Silicon
 Tungsten vs Tungsten

Elastomer :

Supplied in Viton as standard
 Nitrile and EPDM available on request

Tel : 031-7052020

Fax : 031-7052022

Email : Wilfred@mehseals.co.za

All dimensions and limits are for guidance purposes only. Shaft dimension and medium are critical in determining correct limits. If in doubt contact the above.