


Type 70

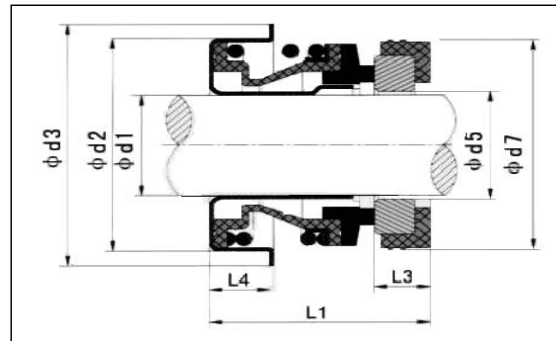

INCHES	d1	d2	d3	d5	d7	L1	L3	L4
3/8	11.0	24	29	12	23	17	4	7
1/2	14.2	28.55	32	14	25	18.2	5	8
1/2	14.2	30	35	15	24/23	18	5	8
1/2	14.2	33.4	38	14	25	18	5	6.7
5/8	18.2	36.45	41.5	18	31	19.8	5	8
5/8	18.2	38.1	41.5	18	31	19.8	5	8
3/4	21.2	38/40	43.8	21	35	20.5	5	9.5
3/4	21.2	38/40	43.8	21	35	20.5	5	10.3
1"	26.4	46/47	51	29	44	25	7	10
1"	26.4	52	57	29	48	25	7	10
1 1/8	31.0	52	57	32	48	27	8	11

Operating limits :

Pressure : 6 bar
 Temperature : -40 °C - 180 °C (Viton)
 Speed : 15 m/s

Faces :

Carbon vs Ceramic

Elastomer :

Supplied in Nitrile as standard
 Viton on request

Tel : 031-7052020

Fax : 031-7052022

Email : Wilfred@mechseals.co.za

All dimensions and limits are for guidance purposes only. Shaft dimension and medium are critical in determining correct limits. If in doubt contact the above.